

# STRAIGHT POWER 11

## Platinum

WORLD CLASS QUIET AND EFFICIENCY

1200W • 1000W • 850W • 750W • 650W • 550W

### IDEAL APPLICATIONS

Extremely silent PC builds  
Advanced multi-GPU gaming  
Multimedia and home theater systems  
3D graphics, photo and video editing

### HIGHLIGHTS

80 PLUS® Platinum efficiency of up to 94,1%  
Virtually inaudible Silent Wings 3 135mm fan  
Wire-free design inside the PSU  
Convenient modular cable management

#### World Class Quiet and Efficiency

The be quiet! Straight Power 11 Platinum series provides a new level of silent performance for systems that demand whisperquiet operation without the slightest compromise in power quality. The 80 PLUS Platinum label proves the focus on efficiency of this latest generation of the Straight Power series. These all go to make the Straight Power 11 series more silent and efficient than ever and clearly the best choice when building new systems or as an upgrade to existing systems.

#### Highlights »

- 80 PLUS Platinum certification with an outstanding efficiency of up to 94,1%
- Big funnel-shaped fan opening of the PSU case for high airflow intake
- Wire-free on the DC side for enhanced cooling and longevity of components
- Modular cables for maximum build flexibility
- Advanced stability and voltage regulation thanks to LLC, SR and DC-to-DC
- Four high-performance 12V-rails
- Multi-GPU support with up to six PCIe connectors
- Japanese 105°C-rated capacitors ensure stability and reliability
- Power signal stability unmatched in its class
- ErP and Energy Star 7.0 ready
- 5-year manufacturer's warranty
- Product conception, design and quality control in Germany



# STRAIGHT POWER 11

## Platinum

WORLD CLASS QUIET AND EFFICIENCY

be quiet!

### Technical Data »

IN GENERAL	Model	1200W	1000W	850W	750W	650W	550W
	Article no.	BN310	BN309	BN308	BN307	BN306	BN305
	EAN code	4260052187418	4260052187401	4260052187395	4260052187388	4260052187371	4260052187364
	Voltage (Vac) / Frequency (Hz)	100-240 / 50-60	100-240 / 50-60	100-240 / 50-60	100-240 / 50-60	100-240 / 50-60	100-240 / 50-60
	Dimensions (L x W x H)	170 x 150 x 86	170 x 150 x 86	170 x 150 x 86	160 x 150 x 86	160 x 150 x 86	160 x 150 x 86
	ATX 12V 2.51 / EPS 12V 2.92	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / -
	Wire-free (DC-side)	✓	✓	✓	✓	✓	✓
	Silent Wings 3 fan (mm)	135	135	135	135	135	135
	Noise level (dB(A)) at 20 / 50 / 100% load	9.4 / 11.5 / 32.9	7.8 / 8.0 / 28.1	7.7 / 7.9 / 22.0	8.6 / 9.3 / 20.8	8.9 / 9.6 / 16.8	9.0 / 9.6 / 14.9
	12V-rails	4	4	4	4	4	4
	PFC	active	active	active	active	active	active
	Efficiency (%) at 230V	80 PLUS® Platinum / 93,9%	80 PLUS® Platinum / 94,1%	80 PLUS® Platinum / 94%	80 PLUS® Platinum / 93,7%	80 PLUS® Platinum / 93,7%	80 PLUS® Platinum / 93,8%
	Energy Star 7.0 compatible	✓	✓	✓	✓	✓	✓
	ErP ready / Power in stand-by (W)	✓ / 0.16	✓ / 0.16	✓ / 0.16	✓ / 0.16	✓ / 0.16	✓ / 0.16
	OCP, OVP, UVP, SCP, OPP, OTP	✓	✓	✓	✓	✓	✓
	Lifetime of PSU at 25°C (h)	100,000	100,000	100,000	100,000	100,000	100,000
CABLES	No. of cables	11	11	11	10	9	8
	Maximum cable length (cm)	115	115	115	115	115	115
	Length of ATX-connection cable (cm)	60	60	60	60	60	60
	Full cable management	✓	✓	✓	✓	✓	✓
	Sleeved cables	✓	✓	✓	✓	✓	✓
CONNECTORS	ATX motherboard (20+4-pin)	✓	✓	✓	✓	✓	✓
	PCI express (6+2-pin)	6	6	4	4	4	2
	P8-/P4-connector	1x P4+4 / 1x P8	1x P4+4 / 1x P8	1x P4+4 / 1x P8	2x P4+4 / 1x P8	2x P4+4 / 1x P8	1x P4+4
	S-ATA	11	11	11	11	9	9
	P-ATA	4	4	4	4	3	3

### Output Data »

AC Input		100 - 240Vac 50 - 60Hz 8 - 4A							
DC Output		3.3V	5V	12V1	12V2	12V3	12V4	-12V	5VSB
550W	Max. Current	22A	22A	18A	18A	20A	20A	0.3A	3A
	Max. Combined Power	110W 549.6W 3.6W 15W							
		550W							

AC Input		100 - 240Vac 50 - 60Hz 10 - 5A							
DC Output		3.3V	5V	12V1	12V2	12V3	12V4	-12V	5VSB
850W	Max. Current	25A	25A	21A	21A	26A	26A	0.5A	3A
	Max. Combined Power	150W 849.6W 6W 15W							
		850W							

AC Input		100 - 240Vac 50 - 60Hz 8 - 4A							
DC Output		3.3V	5V	12V1	12V2	12V3	12V4	-12V	5VSB
650W	Max. Current	24A	24A	18A	18A	22A	22A	0.3A	3A
	Max. Combined Power	120W 649.2W 3.6W 15W							
		650W							

AC Input		100 - 240Vac 50 - 60Hz 13 - 6.5A							
DC Output		3.3V	5V	12V1	12V2	12V3	12V4	-12V	5VSB
1000W	Max. Current	25A	25A	22A	22A	30A	30A	0.5A	3A
	Max. Combined Power	150W 999.6W 6W 15W							
		1000W							

AC Input		100 - 240Vac 50 - 60Hz 10 - 5A							
DC Output		3.3V	5V	12V1	12V2	12V3	12V4	-12V	5VSB
750W	Max. Current	25A	25A	20A	20A	24A	24A	0.3A	3A
	Max. Combined Power	130W 750W 3.6W 15W							
		750W							

AC Input		100 - 240Vac 50 - 60Hz 15 - 7.5A							
DC Output		3.3V	5V	12V1	12V2	12V3	12V4	-12V	5VSB
1200W	Max. Current	25A	25A	24A	24A	38A	38A	0.5A	3A
	Max. Combined Power	150W 1200W 6W 15W							
		1200W							


# STRAIGHT POWER 11

## Platinum

WORLD CLASS QUIET AND EFFICIENCY

be quiet!


### Cables »

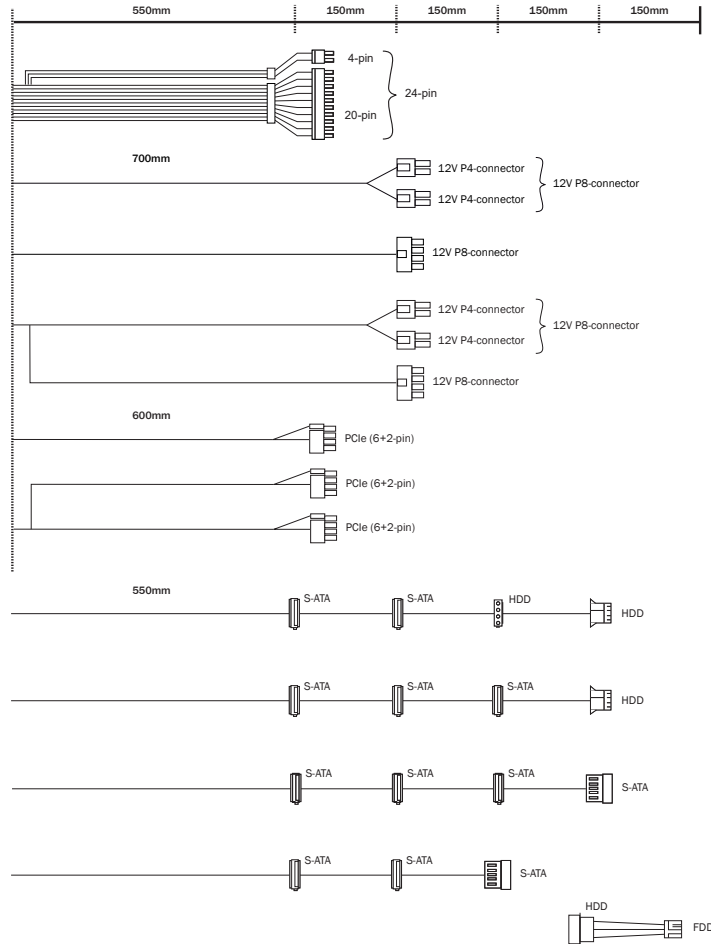


### Cable length to first connector

1200W	1000W	850W	750W	650W	550W
600mm	600mm	600mm	600mm	600mm	600mm
700mm	700mm	700mm	700mm	700mm	700mm
700mm	700mm	700mm	-	-	-
-	-	-	700mm	700mm	-
-	-	600mm 2x	-	-	600mm 2x
600mm 3x	600mm 3x	600mm 1x	600mm 2x	600mm 2x	-
550mm 2x	550mm 2x	550mm 2x	550mm 2x	550mm	550mm
-	-	-	-	550mm	550mm
550mm	550mm	550mm	550mm	550mm	550mm
550mm	550mm	550mm	550mm	-	-

### Dimensions (mm) »

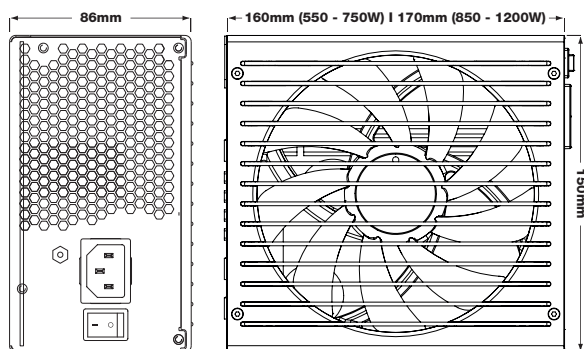

### Certifications »

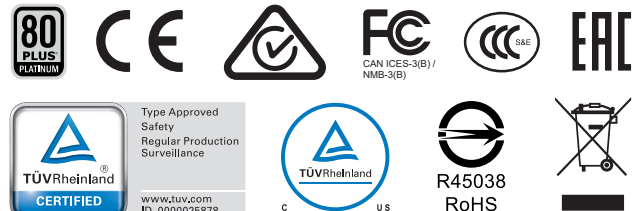

### Contact »

be quiet! Headquarters  
Listan GmbH  
Wilhelm-Bergner-Straße 11c  
21509 Glinde  
Germany

Service hotline: +49 40 7367 686 44  
e-mail: [service@bequiet.com](mailto:service@bequiet.com)  
Visit the contact section on [bequiet.com](http://bequiet.com)  
for the right regional service information.