



TFX POWER 3

COMPACT AND SILENT ENERGY

300W

IDEAL APPLICATIONS

Mini and media PC systems
Systems with low installation depth
Classic office and web applications

HIGHLIGHTS

80 PLUS® Gold / Bronze efficiency (up to 91.7 / 88.3%)
Up to two strong dual 12V-rails
Compact and space-saving design
Sleeved or flat black cables for convenient usage

Compact And Silent Energy

TFX Power 3 300W: the upgraded be quiet! high-efficiency PSU for mini and media PCs with great features at a reasonable price.

Highlights

- Certified 80 PLUS Gold and Bronze efficiency (up to 91.7%)
- High stability and PCIe graphics card support
- 300W of continuous power
- High-quality temperature-controlled 80mm fan for low-noise operation
- Sleeved or flat black cables up to 60cm long
- Meets the latest safety and efficiency requirements
- Standby draw less than 0.17 watts
- Three-year manufacturer's warranty
- Product conception, design and quality control in Germany



TFX POWER 3

COMPACT AND SILENT ENERGY

be quiet!®

Technical Data			
IN GENERAL	Model	300W Gold	300W Bronze
	Article no.	BN323	BN322
	EAN Code	4260052188293	4260052188286
	Voltage (Vac) / Frequency (Hz)	100 - 240 / 50 - 60	100 - 240 / 50 - 60
	Dimensions (L x W x H)	175 x 85 x 65	175 x 85 x 65
	TFX 12V 2.52 / EPS 12V 2.92	✓ / ✓	✓ / ✓
	Wire-free (DC-side)	-	-
	Silence-optimized be quiet! fan (mm)	80	80
	Noise level (dB(A)) at 20 / 50 / 100% load	9.7 / 12.4 / 21.7	14.6 / 15.4 / 29.1
	12V rail (Multi-Rail) / 12V Single Rail	2 / -	- / ✓
	Overclocking Key / Jumper	- / -	- / -
	Power Good signal	100-150ms	100-150ms
	PFC	active	active
	Certification / Efficiency (%) at 230V	80 PLUS® Gold / 91.7%	80 PLUS® Bronze / 88.3%
	Energy Star 7.0 compatible	✓	✓
CABLES	ErP ready / Power in stand-by (W)	✓ / <0.17	✓ / <0.14
	OCP / OVP / UVP / SCP / OPP / OTP	✓ / ✓ / ✓ / ✓ / ✓ / -	✓ / ✓ / ✓ / ✓ / ✓ / -
	Lifetime of PSU at 25°C (h)	100,000	100,000
	No. of cables	5	5
	Maximum cable length (cm)	60	60
	Length of ATX-connection cable (cm)	35	35
CONNECTORS	Cable management	Fixed	Fixed
	Sleeved cables	20+4 pin	20+4 pin
	Flat cables	PCIe, drives, P4	PCIe, drives, P4
	ATX motherboard (20+4-pin)	✓	✓
	PCI express (6+2-pin)	1	1
	P8-/P4-connector	- / 1	- / 1
	SATA	3	3
	PATA	2	2
	FDD (Floppy)	1	1

Output Data

AC Input		100-240Vac		50-60Hz	6-2.5A		
DC Output		3.3V	5V	12V1	12V2	-12V	5VsB
300W Gold	Max. Current	18A	18A	13A	13A	0.3A	3A
				24A			
	Max. Combined Power	103W		288W		3.6W	15W
300W							

AC Input		100-240Vac		50-60Hz	5-2A	
DC Output		3.3V	5V	12V1	-12V	5VsB
300W Bronze	Max. Current	16A	16A	25A	0.3A	2.5A
				25A		
	Max. Combined Power	85W		300W		3.6W
300W						


TFX POWER 3

COMPACT AND SILENT ENERGY


be quiet!

Cables

Gold

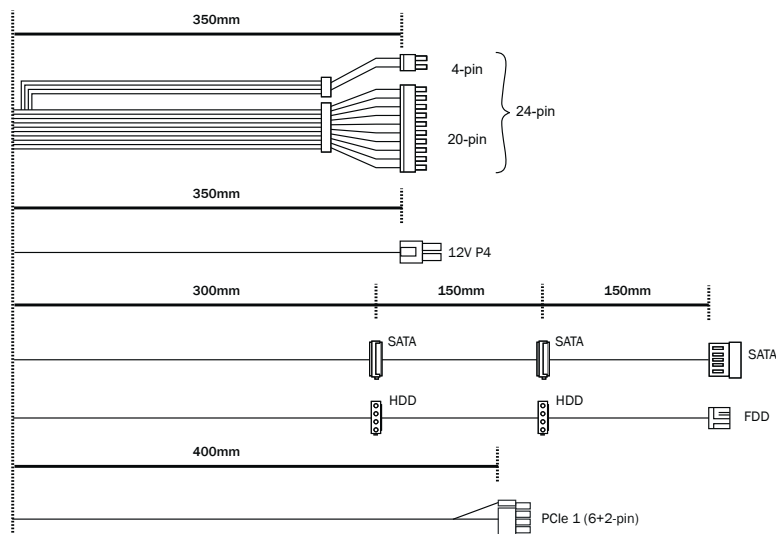


Bronze

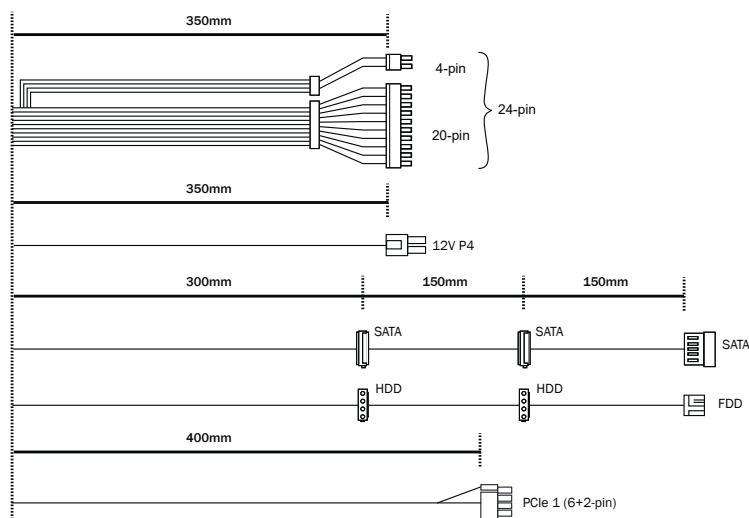

Logistics data

Region	Model	Article no	EAN code
EU	TFX Power 3 300W Gold	BN323	4260052188293
EU	TFX Power 3 300W Bronze	BN322	4260052188286

Dimensions

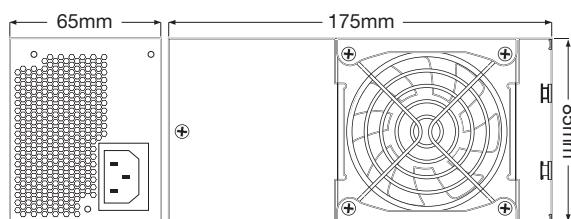

Certifications



Contact

be quiet! Headquarters
Listan GmbH
Wilhelm-Bergner-Straße 11c
21509 Glinde
Germany

Service hotline: +49 40 7367 686 44
e-mail: service@bequiet.com

Visit the contact section on bequiet.com for the right regional service information.